



No. 1 Solar PCU from 10 Years with **Patented rMPPT Technology**




Go Solar
With **UTL SOLAR**

SOLAR SOLUTION

For your home & business



Solar Inverters | Batteries | Solar PCUs | Online UPSs |
EV Chargers | Lithium Batteries | Solar Panels

www.upsINVERTER.com






ABOUT UTL

UTL was founded in the year 1996 by 2 proficient engineers **Mr Yogesh Dua** and **Mr Pawan Garg**. UTL is one of the leading brand in power back-up and power generation in India. UTL offers wide range of quality products, has 4 manufacturing units, strong network of distributors and dealers across the globe and highly motivated workforce. We are offering excellent R&D services through the team of more than 60+ R&D professionals and exporting R&D services & UL Certified products to various countries including USA. As the company values long term relationship, our stakeholders and even customers have very long association with UTL.

Some remarkable milestones covered by UTL are...

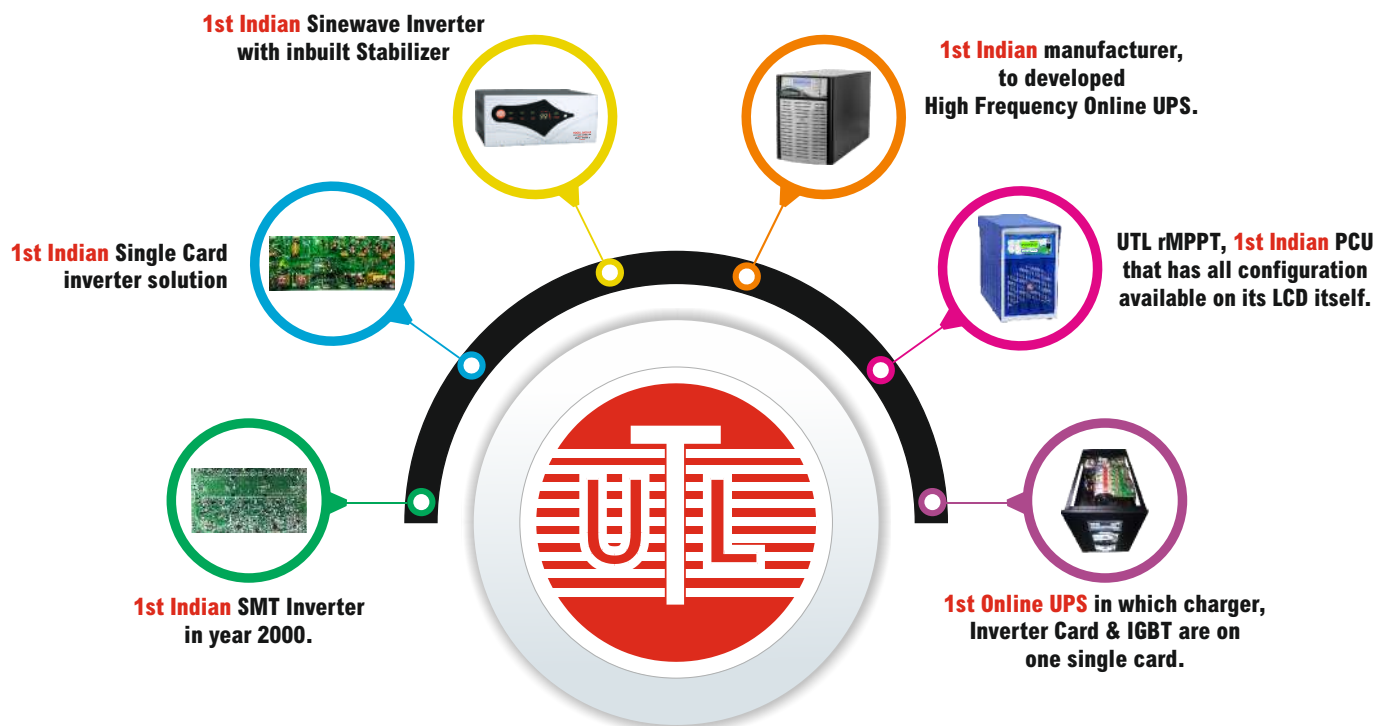



UTL in 2023-2024

4

Manufacturing Units

28

Years Old Brand

60+

Strong R&D Team

120

kVA- We made upto 120kVA Capacity

3000+

Associated Man Power

500+

Distributor in INDIA

3600+

Dealers in INDIA

5000000+

Satisfied UTL Consumers

9.2 Bn

UTL Turnover

Manufacturing Energetic Excellence

SOLAR PANEL PLANT, NOIDA, UP



Scan and
View Plant Video



BATTERY PLANT, BAWAL, HARYANA



Scan and
View Plant Video



INVERTER PLANT, PARWANOO, HP



Scan and
View Plant Video



HELIAC (Solar Home PCU)

**“Cost Effective PCU Compatible
with Tubular Batteries.”**

**Model Available
HL1050 to HL4000**



FEATURES

- Pure Sine Wave Output.
- Inbuilt PWM Solar Charge Controller.
- Multi-Colour LCD Display.
- Freq.-Available 50 & 60Hz.
- Multi Charging Stage (Bulk, Absorption & Float) Auto Equalize in a month.
- Solar Priority for Load & Battery Charging.
- Preference to Solar Power over Grid Power.
- Protections : RBP, RSPV, OVL, BL, BH, S.Ckt, I/P HV& LV, OHT.
- Compatible with DG as an Input Source.
- Compatible with IT Load.
- Priority Selection - PCU, Smart & Hybrid for Saving Energy and Money.
- Support 1HP Motor in Model No 3000, 3550 & 4000

HELIAC (Solar Home PCU)

Parameters				Rating					
Product				SOLAR PCU					
Model No.		HI1050	HL1500	HL2000	HL2500	HL3025	HL3550	HL4000	
System Capacity		850VA	1050VA	1500VA	2000VA	2200VA	3000VA	3500VA	
Bulb Load Max. (Linear Load : Resistive + Inductive)		680W	840W	1200W	1600W	1760W	2400W	2800W	
Operating DC Voltage		12V			24V			48V	
Switching Element		Mosfet							
Charger Topology		Boost Mosfet							
Battery Capacity		200AH MAX.							
Operating Mode		SMART/PCU/HYBRID							
DG Mode		Enable/Disable							
Solar Voc Range (Min - Max)		17V-25V			31V-55V			60V-105V	
Solar Panel Recommended (Watt)		650W	800W	1200W		2000W		3000W	
S*/Series,P*-parallel		165W x 4P*	165W x 5P*	335W x 4P*/400W x 3P* 540W x 2P*		335W x 6P*/400W x 5P* 540W x 4P*		335Wx2S*/400Wx2S* & 4P*/540Wx2S* &3P*	
Parameters (Grid)				Default Value					Variable Range
Nominal Grid Voltage				230V 1Φ					
Nominal Grid frequency				50Hz					
Frequency Range				47-53Hz ± 1Hz					
Default mode				TUB/SMF					
Grid Charging Voltage		TUB	Boost		14.5V ± 0.2V				13.5V-15V
Grid Charging Voltage			Float		13.8V ± 0.2V				13V-14.2V
Grid Charging Voltage		SMF	Boost		13.5V ± 0.2V				13.5V-14.2V
Grid Charging Voltage			Float		13.5V ± 0.2V				13.5V-14.2V
Battery Charging Method 4 Stages				Bulk/Absorption/Float/Equalize					
Grid Charging Voltage (Equalize)				After 30 Days					NA
Grid Charging Current (Normal/Boost)				12A/15A ± 2A					1A-20A
Optional Grid Charging		Enable/Disable		Enable					
Grid Reconnect @ Battery Voltage				11.8V ± 0.2V					11V-12V
Grid Low Cut Voltage		IT Mode Enable		170V ± 10V					
Grid Low Cut Recovery				180V ± 10V					
Grid High Cut Voltage				265V ± 10V					
Grid High Cut Recovery				255V ± 10V					
Grid Low Cut Voltage		IT Mode Disable		100V ± 10V					
Grid Low Cut Recovery				110V ± 10V					
Grid High Cut Voltage				290V ± 10V					
Grid High Cut Recovery				280V ± 10V					
Changeover (Batt. to Mains)		IT Mode Enable/Disable		<5ms					
Changeover (Mains to Batt.)		IT Mode Enable		<12ms					
		IT Mode Disable		<30ms					
Parameters (Inverter)				1Φ					
Output Phase				220V ± 8%					50-60Hz
Nominal Output Voltage				50Hz ± 1%					
Nominal Frequency				50Hz ± 1%					
Max. Output Current (A)		2.3	2.9	4.3	5.6	6.8	9	10.0	
Battery Low Buzzer				10.8V ± 0.2V					Battery Low Cut+0.3V
Battery Low Cut				10.5V ± 0.2V					10V-11.5V
Battery High Cut				16.5V ± 0.2V					16.5V-17.5V
Output Waveform				Sinewave					
Typical Efficiency		≥80%			≥85%				
Voltage Harmonic				<3% (Linear Load)					
Over Load Capacity		IT Mode Disable		>100% After 30 sec delay (with Alarm) 3Time Auto Reset, 4th Time Shut Down Note : 1HP Motor Load Run for 15min with alarm (1 sec ON 5sec OFF) in 2500 & 3025 Model.					
		IT Mode Enable		>100% After 30 sec delay 1st Time Shut Down					
Motor 1 HP				>115% Output Goes Down					
Protection		NA							Yes(<6.5A) Yes(<7.5A) Yes
LED Indication				Overload, Battery Low, Battery High, Output Short Ckt., Battery Reverse (Fuse Blown), Over Heat @90°C + 10°C , Over/Under Frequency, I/P Hi, I/P Low, SPV High.					
Switches (Micro)				System ON, (IT Mode, SMF/TUB, Boost Chg., DG Mode, Grid Chg.) Enable/Disable.					
Display (Multi Color)				System ON/OFF, UP, Down, Back, Enter(For LCD Calibration)					
Display (Multi Color)				Batt. Voltage, Chg. Current, Grid Voltage, Grid Freq., O/P Voltage, O/P Freq. Load%, Batt. Graph, Overheat, BLK/ABS/FLT , SPV Current, Operating Mode (HYB/PCU/SMT).					
Parameters (Solar)									
Switching Element				Mosfet					
Type of Charger				PWM					
SPV Charging Voltage (Boost)		TUBULAR	15V ± 0.2V						14.2V-15.5V
SPV Charging Voltage (Reconnect)			14.2V ± 0.2V						13.1V-14.5V
SPV Charging Voltage (Boost)		SMF	14.0V ± 0.2V						13.6V-14.5V
SPV Charging Voltage (Reconnect)			13.7V ± 0.2V						13.6V-14.5V
Efficiency				≥95%					
Solar Current MIN.				>3A (Below 3A, System will act like Solar Absent)					
Parameters (Environment)									
Operating Temperature				0-50°C					
Cooling				Fan					
Max. Relative Humidity @25°C (non Condensing)				95%					
Noise @ 1meter				50dB					
Standard Compliance				IP20					
Weight (kg)		10	11	15	18	17	25	25	
Dimension L x W x H(mm)		275x306x128		300x306x167	300x306x207	333x306x275	333x306x315		

Note. * Specification are subject to change without prior notice due to constant improvement in design & technology.*
Above mention battery parameter is according to single battery.

SUN PLUS (Solar Home PCU)

“Affordable Yet, Very Reliable”



**Model Available
SP 960 to SP 1860**

FEATURES

- Maintain battery health for longer life.
- Modified Sine wave output.
- Built-in IT mode.
- Easy Installation & low maintenance.
- Best Regulated output.
- Battery Charging with Multi stage (Bulk, Absorption & Float)
Auto Equalize in a month.
- Protections : RBP, RSPV, OVL, BL, BH, S.Ckt, I/P HV& LV, OHT.
- Inbuilt PWM Solar Charge Controller.
- Priority Mode Selection
 - 1) PCU 2) Hybrid 3) Smart
 For Saving Energy & Money.
- Can Operated without Solar.
- LED Display for Operation & Fault.

SUN PLUS (Solar Home PCU)

Parameters		Rating			
Model No		SUN PLUS 960	SUN PLUS 1060	SUN PLUS 1460	SUN PLUS 1860
System Rating		675VA	875VA	1075VA	1475VA
Operating DC Voltage		12V			24V
Switching Element		Mosfet			
Charger Topology		Triac Based			
Max. Battery Capacity		200AH			
Operating Mode (SMART/PCU/HYBRID)		HYBRID			
Parameters (Grid)		Default Value			
Nominal Grid Voltage		230V 1Φ			
Nominal frequency		50Hz			
Battery Charging Method 4 Stages		Bulk/Absorption/Float/Equalize			
Grid - Battery Charging Voltage (TUB) Default mode	Boost	14.5V ± 0.2V (Each battery)			
	Float	13.8V ± 0.2V (Each battery)			
Grid - Battery Charging Voltage (SMF)	Boost	13.5V ± 0.2V (Each battery)			
	Float	13.5V ± 0.2V (Each battery)			
Grid - Battery Charging Voltage (Equalize)		After 30 days			
Grid Charging Current	Default	Boost Mode			
	Normal/Boost	12A/15A ± 2A			
	Enable/Disable	Enable			
Grid Reconnect @ Battery Voltage		11.8V ± 0.2V (Each battery)			
Grid Low Cut Voltage	IT Mode Enable	170V ± 10V			
Grid Low Cut Recovery		180V ± 10V			
Grid High Cut Voltage		265V ± 10V			
Grid High Cut Recovery		255V ± 10V			
Grid Low Cut Voltage	IT Mode Disable	100V ± 10V			
Grid Low Cut Recovery		110V ± 10V			
Grid High Cut Voltage		290V ± 10V			
Grid High Cut Recovery		280V ± 10V			
Change Over (Battery to Mains)	IT Mode Enable/disable	<5ms			
Change Over (Mains to Battery)		<15ms			
Parameters (Inverter)					
Output Phase		1Φ			
Nominal output voltage		240V ± 10% RMS			
Nominal Frequency		50Hz ± 1%			
Max. Output Current		2.1A	2.5A	2.9A	4.3A
Output Waveform		Modified Sinewave			
Battery Low Buzzer		10.8V ± 0.2V (Each battery)			
Battery Low Cut		10.5V ± 0.2V (Each battery)			
Battery High Cut		17V ± 0.2V (Each battery)			
Typical Efficiency		>82%	>80%		>88%
Over Load Capacity	IT Mode Disable	>100% After 30 sec delay (with Alarm) 3Time Auto Reset , 4th Time Shut Down			
	IT Mode Enable	>100% After 30 sec delay (with alarm) 1st Time Shut Down			
		>150% Output Goes Down			
Protection		Overload, Battery Low, Battery High, Output Short Ckt, Battery Reverse (Fuse Blown), Over Heat @90°C ± 10°C , SPV High , I/P HV, I/P LV			
LED Indication		System ON, (IT mode, SMF/TUB, Boost Chg, Grid Chg.)Enable/Disable, Mains Status, Overload, Grid chg., Inverter ON, Battery Status, SPV Chg., Fault			
Switches		System ON, (IT Mode, SMF/TUB, Boost Chg, Grid Chg.) Enable/Disable			
Parameters (Inverter)					
Switching Element		MOSFET			
Type of Charger		PWM			
SPV Charging Voltage (TUB)	Boost	15V ± 0.2V (Each Battery)			
	Float	14.2V ± 0.2V (Each Battery)			
SPV Charging Voltage (SMF)	Boost	13.7V ± 0.2V (Each Battery)			
	Float	13.7V ± 0.2V (Each Battery)			
Max. SPV Current		25A	50A	50A	50A
Efficiency		>95%			
Input Voltage Range (Min- Max) Voc		17V-25V			31V-49.5V
Maximum PV Power Recommended		(150W/160W)X2 (Parallel)	(150W/160W)X4 (Parallel)	(150W/160W)X5 (Parallel)	(315W/320W/325W)X4 (Parallel)
Parameters (Environment)					
Operating Temperature		0-50°C			
Cooling		Fan			
Max. Relative Humidity @ 25°C (non Condensing)		95%			
Noise @ 1 meter		50dB			
Standard Compliance		IP20			
Weight (kg)		7.75	8.8	11	14.2
Dimension (LXWXH)		275X276X131mm		306*274*166 mm	

*Specification are subject to change without prior notice due to constant improvement in design & technology.

SUN PLUS PRO (Solar Home PCU)

“Affordable Yet, Very Reliable”



**Model Available
SPP 920 to SPP 1420**

FEATURES

- Inbuilt rMPPT Solar Charge Controller.
- Built-in IT mode.
- Easy Installation & low maintenance.
- Best Regulated output.
- Protections : RBP, RSPV, OVL, BL, BH, S.Ckt, I/P HV & LV, OHT.
- Battery Charging with Multi stage (Bulk, Absorption & Float)
Auto Equalize in a month.
- Priority Mode Selection : 1) Hybrid 2) Smart
For Saving Energy & Money.
- Can Operated without Solar.
- LED Display for Operation & Fault.
- Charging in Low Voltage 90V.
- Support 12V and 24V panels in a 12V system.
- Charging in Low Voltage 90V.

SUN PLUS PRO (Solar Home PCU)

Parameters		Rating		
Products		SUN PLUS PRO SOLAR PCU		
Model No.		SUN PLUS PRO 920	SUN PLUS PRO 1020	SUN PLUS PRO 1420
System Rating		700VA	900VA	1100VA
Operating DC Voltage		12V		
Maximum PV Power Recommended		540Wx1		
Switching Element		MOSFET		
Charger Topology		BOOST MOSFET		
Max. Battery Capacity		200AH		
Operating Mode (SMART/HYBRID)		HYBRID		
Parameters (Solar)				
Switching Element		MOSFET		
Type of Charger		MPPT		
SPV Charging Voltage (TUB)	Boost	14.7V ± 0.2V (Each Battery)		
	Float	14.2V ± 0.2V (Each Battery)		
Solar PV Maximum Voltage		25 -50 VOC		
Efficiency		>95%		
Parameters (Grid)		Default Value		
Nominal Grid Voltage		230V 1Φ		
Nominal frequency		50Hz		
Battery Charging Method 4 Stages		Bulk/Absorption/Float/Equalize		
Grid - Battery Charging Voltage	Boost	14.5V ± 0.2V (Each battery)		
	Float	13.8V ± 0.2V (Each battery)		
Grid - Battery Charging Voltage (Equalize)		After 30 days		
Grid Charging Current	Normal/Boost	15A /18A/12A ±2A		
Grid Reconnect @ Battery Voltage		11.8V ± 0.2V (Each battery)		
Grid Low Cut Voltage	IT MODE ENABLE	170V ± 10V		
Grid Low Cut Recovery		180V ± 10V		
Grid High Cut Voltage		265V ± 10V		
Grid High Cut Recovery		255V ± 10V		
Grid Low Cut Voltage	IT MODE DISABLE	80V ± 10V		
Grid Low Cut Recovery		90V ± 10V		
Grid High Cut Voltage		280V ± 10V		
Grid High Cut Recovery		275V ± 10V		
Change Over (Battery to Mains)	IT MODE ENABLE	<8ms		
Change Over (Mains to Battery)		<15ms		
Parameters (Inverter)				
Output Phase		1Φ		
Nominal output voltage		230V±10% RMS		
Nominal Frequency		50 Hz±1%		
Max. Output Current		2.1A	2.9A	3.5A
Output Waveform		Modified Sinewave		
Battery Low Buzzer		10.8V ± 0.2V (Each battery)		
Battery Low Cut		10.5V ± 0.2V (Each battery)		
Battery High Cut		16.5V ± 0.2V (Each battery)		
Typical Efficiency		≥80%		
Over Load Capacity	IT Mode Disable	>100% After 30 sec delay (with Alarm) 3Time Auto Reset , 4th Time Shut Down		
	IT Mode Enable	>100% After 30 sec delay (with alarm) 1st Time Shut Down		
Protection		Overload, Battery Low, Battery High, Output Short Ckt, Battery Reverse (Fuse Blown) , Over Heat @90°C ± 10°C , SPV High, SPV Reverse , I/P HV, I/P LV		
LED Indication		System ON, Grid Status, Over load/Heat , Grid chg., Batt. ON, SPV Chg. Batt. Status .		
Switches		System ON, (IT Mode, Hybrid , Boost Charging)		
Parameters (Environment)				
Operating Temperature		0-45°C		
Cooling		Fan		
Max. Relative Humidity @ 25°C (non Condensing)		95%		
Noise @ 1 meter		50dB		
Standard Compliance		IP20		
Weight (kg)		7.6	8.4	11
Dimension (LXWXH)		275X305X131mm		306*305*180 mm

*Specification are subject to change without prior notice due to constant improvement in design & technology.

GAMMA⁺ LiON

Wall Mountable rMPPT Solar PCU
with Built-in LiFePO4 Battery.

Model Available
GAMMA⁺ 1200



FEATURES

- Inbuilt LiFePO4 Battery with Zero battery maintenance & Long battery life.
- Controller-based design Pure Sine Wave.
- Built-in rMPPT charge controller that supports 1kW panels.
- Compact design with Multi-colour LCD Display.
- Preference to Solar Power over Grid Power.
- Multi-functional smart Options Priority Selection - PCU, Smart & Hybrid for Saving Energy & Money
- 5 years warranty on both Inverter and battery



**FAST
CHARGING**



**2X
LONGER LIFE**



**ZERO
MAINTENANCE**



**5 YEARS
WARRANTY**

GAMMA+ LiON (Wall Mounted rMPPT Solar PCU)

Parameters			
Product		Solar PCU	
Model No.		Gamma+ LiON 1200	
System Rating		1000VA	
Operating DC Voltage		25.6V	
Switching Element		MOSFET	
Max. Battery Capacity		Boost Charging Topology	
Grid Charger Topology		1.2kW/48A LiFePo4 (Inbuilt)	
Operating Mode	SMART/PCU/HYBRID	Smart mode (Default)	
Optional DG mode	Enable/Disable	Disable (Default)	
Solar Power Maximum		1000W	
Input Voltage Range (Min, - Max) Voc		30V-106V	
Parameters (Grid)		Default Value	Variable settable Range (Each Batt.)
Nominal Grid Voltage		230V 1Φ	
Nominal frequency		50Hz	
Frequency Range		47-53Hz ± 1Hz	
Battery Charging Method 3 Stages		Bulk/Absorption/Float	
Grid - Battery Charging Voltage	Boost/Float	13.8V±0.2V (Each Battery)	13.5V-14.2V
Grid Charging Current	Normal/Boost	15A/18A ±2A	1A -20A
Optional Grid charging	Enable/Disable	Enable	
Grid Reconnect @ Battery Voltage		12.4V ±0.2V (Each Battery)	12-13V
Grid Low Cut Voltage	IT mode Enable	170V ± 10V	
Grid Low Cut Recovery		180V ± 10V	
Grid High Cut Voltage		265V ± 10V	
Grid High Cut Recovery		255V ± 10V	
Grid Low Cut Voltage	IT mode Disable	100V ± 10V	
Grid Low Cut Recovery		110V ± 10V	
Grid High Cut Voltage		290V ± 10V	
Grid High Cut Recovery		280V ± 10V	
Change Over (Battery to Mains)	IT mode Enable/Disable	<8ms	
Change Over (Mains to Battery)	IT mode Enable	<12ms	
	IT mode Disable	<30ms	
Parameters (Inverter)			
Output Phase		1Φ	
Nominal Output Voltage		220V	
Output voltage range		220V±8%	
Nominal Frequency		50 Hz±1%	50 Hz/60 Hz
Max. Output Current		3.0A	
Battery Low Buzzer		11.9V±0.2V (Each Battery)	NA
Battery Low Cut		11.6V±0.2V (Each Battery)	11-12V
Battery High Cut		14.5±0.2V (Each Battery)	NA
Output Waveform		Sinewave	
Typical Efficiency		>82%	
Voltage Harmonic		<3% (Linear Load)	
Over Load Capacity	IT Mode Disable	>100% After 30 sec delay (with alarm) 3Time Auto Reset , 4th Time Shut Down	
	IT Mode Enable	>100% After 30 sec delay (with Alarm) 1st Time Shut Down	
Protection		Overload, Battery Low, Battery High, Output Short Ckt, Battery Reverse (Through MCB) , Over Heat @90°C ± 10°C, Over/Under frequency, I/P High, I/P Low, SPV High, SPV Low	
LED Indication		System ON, (IT mode , Boost Chg , DG mode , Grid Chg.) Enable/Disable	
Switches (Micro)		System ON/OFF, UP, Down, Back, Enter (For LCD Calibration)	
Display (Multi color)		Battery Voltage, Charging Current, Grid Voltage, Grid Frequency, Output Voltage, Output Frequency, Load %, Battery Graph, Overheat, SPV Current, Operating Mode (HYB/PCU/SMT)	
Parameters (Solar)			
Switching Element		Mosfet	
Type of Charger		rMMPT	
SPV Charging Voltage	Boost/Float	13.9V+0.2V (Each Battery)	13.6-14.4V
Solar Charging Current (Battery)		20A ±2A (Default)	11-22A
Battery Charging Method 3 Stages		Bulk/Absorption/Float	
Efficiency		>94%	
Parameters (Environment)			
Operating Temperature		0-50°C	
Cooling		Fan	
Max. Relative Humidity @ 25°C (Non Condensing)		95%	
Noise @ 1 meter		50dB	
Standard Compliance		Ip20	
System Weight (KG)		12.5	
Dimension (LXWXH)mm		327.8 X305.5 X 116	

Specification are subject to change without prior notice due to constant improvement in design & technology.

GAMMA⁺ (Solar Home PCU)

“Get Two Battery Back-up in Single Battery”

Model Available
1000-3350



FEATURES

- Controller based design, Pure Sine Wave, Built in rMPPT Charge Controller.
- Multi-colour LCD Display.
- Freq.:- Available - 50Hz & 60Hz.
- Charging Multi Stage (Bulk, Absorption & Float)
- Solar Priority of load & Battery Charging.
- Preference to Solar Power over Grid Power.
- Pure sine wave output.
- Protections : RBP, RSPV, OVL, BL, BH, S.Ckt, I/P HV & LV, OHT.
- Compatible with DG as an input Source.
- Compatible with IT Load.
- Compatible with Tubular Batteries (Lithium Optional) .
- Priority Selection - PCU, Smart & Hybrid for Saving Energy and Money.
- Support 1HP Motor in Model No 2600 and 3350.

GAMMA⁺ (Solar Home PCU)

Parameters							
Model No.		GAMMA+1012		GAMMA+2000	GAMMA+2600	GAMMA+3350	
System Rating (VA)		1000		1500	2000	3000	
Operating DC Voltage		12V		24V			
Switching Element		MOSFET					
Charger Topology		Boost Mosfet					
Max. Battery Capacity		200AH					
Operating Mode		SMART/PCU/HYBRID					
Optional DG mode		Enable/Disable					
Solar Power Maximum		1000W		1500W	2000W	2160W	
Input Voltage Range (Min - Max) Voc		15V-53V		30V-106V			
Solar Panel Recommended (Watt)		165x6P, 200X5P (335x3P*) (400/440/540X2P*)		335 (2S* & 2P*) 400 (2S* & 2P*), (540X3P*)	335 (2S* & 3P*) (400/440 (2S* & 3P*), (540X3P*)	335 (2S* & 3P*) 400/440 (2SS* & 2P*) 540(2S* & 2P*)	
Parameters (Grid)		Default Value					Variable Settable Range (Each Batt.)
Nominal Grid Voltage		230V 1Φ					
Nominal frequency		50Hz					
Frequency Range		47-53Hz ± 1Hz					
Battery Charging Method 3 Stages		Bulk/Absorption/Float					
Default charging mode		TUB (LITHIUM Optional)					
Grid - Battery Charging Voltage (TUB)		Boost					
Grid - Battery Charging Voltage (LITHIUM Optional)		Boost / Float					13.5-15V
Grid Charging Current		10A/15A ± 2A					13-14.2V
Optional Grid charging		Enable/Disable					
Grid Reconnect @ Battery Voltage (TUB)		11.8V ± 0.2V (Each Battery)					13.5V-14.2V
Grid Reconnect @ Battery Voltage (LITHIUM Optional)		12.4V ± 0.2V (Each Battery)					
Grid Low Cut Voltage		170V ± 10V					
Grid Low Cut Recovery		180V ± 10V					
Grid High Cut Voltage		265V ± 10V					
Grid High Cut Recovery		255V ± 10V					
Grid Low Cut Voltage		100V ± 10V					
Grid Low Cut Recovery		110V ± 10V					
Grid High Cut Voltage		290V ± 10V					
Grid High Cut Recovery		280V ± 10V					
Change Over (Battery to Mains)		IT Mode Enable/Disable					
Change Over (Mains to Battery)		IT Mode Enable					
		IT Mode Disable					
Parameters (Inverter)							
Output Phase		1Φ					
Nominal Output Voltage		220V					
Output voltage range		220V ± 8%					
Nominal Frequency		50 Hz ± 1%					50Hz/60Hz
Max. Output Current		2.9A	4.3A	5.6A	9A		
Battery Low Buzzer (TUB)		10.8V ± 0.2V (Each Battery)					Battery Low Cut-0.3V
Battery Low Cut (TUB)		10.5V ± 0.2V (Each Battery)					10-11.5V
Battery Low Buzzer (LITHIUM Optional)		11.9V ± 0.2V (Each Battery)					NA
Battery Low Cut (LITHIUM Optional)		11.6V ± 0.2V (Each Battery)					NA
Battery High Cut (TUB)		16.5 ± 0.2V (Each Battery)					16.5-17.5V
Battery High Cut (LITHIUM Optional)		14.5 ± 0.2V (Each Battery)					NA
Output Waveform		Sinewave					
Typical Efficiency		>80%	>82%				
Voltage Harmonic		<3% (Linear Load)					
Over Load Capacity		IT Mode Disable					>100% After 30 sec delay (with Alarm) 1st Time Shut Down
		IT Mode Enable					
Motor 1 HP		NA					>115% Output Goes Down
Protection		Overload, Battery Low, Battery High, Output Short Ckt, Battery Reverse (Fuse Blown), Over Heat @90°C ± 10°C, Over/Under frequency, I/P HV, I/P LV, SPV High, SPV Low					
LED Indication		System ON, (IT mode, TUB/LITHIUM(Optional), Boost Chg, DG mode, Grid Chg.) Enable/Disable					
Switches (Micro)		System ON/OFF, UP, Down, Back, Enter (For LCD Calibration)					
Display (Multi Color)		Battery Voltage, Charging Current, Grid Voltage, Grid Frequency, Output Voltage, Output Frequency, Load %, Battery Graph, Overheat, SPV Current, Operating Mode (HYB/PCU/SMT)					
Parameters (Solar)							
Switching Element		Mosfet					
Type of Charger		MPPT					
SPV Chgarging Voltage (TUB)		15V ± 0.2V (Each Battery)					
SPV Charging Voltage(LITHIUM Optional)		14.2V ± 0.2V (Each Battery)					14-15.5V
Solar Charging Current (Battery)		18A ± 2A (Default)					13.1-14.5V
Battery Charging Method 3 Stages		Bulk/Absorption/Float					13.6-14.4V
Efficiency		>94%					
Parameters (Environment)							
Operating Temperature		0-50°C					
Cooling		Fan					
Max. Relative Humidity @ 25°C (non Condensing)		95%					
Noise @ 1 meter		50dB					
Standard Compliance		IP20					
System Weight (KG)		12.4	16	17.6	27		
Dimension (LXWXH)mm		327.8 X305.5 X 116	333.8 X 305.5 X 158.6	340 X 305.5 X 360			

Note. 1) Specification are subject to change without prior notice due to constant improvement in design & technology.
 2) Solar Panel Max. (*S- Series, *P- Parallel)

ALFA+ & ALFA PRO SOLAR PCU

“Most Featureful Solar PCU”

Model Available
1kVA-20kVA

rMPPT™ Offgrid Solar PCU
(1Ph in 1Ph out)



FEATURES

- DSPIC based Pure Sine Wave Design.
- Inbuilt in rMPPT charge controller (upto 30% more efficient).
- Maximum preference to Solar Power.
- Wi-Fi based Remote Monitoring (GSM Optional).
- Comply with IEC 61683 and IEC 60068-2-(1,2,14,30) standards.
- Reverse AC Voltage Protection.
- User friendly & Easily accessible LCD Display with all AC & DC Parameter Configurable by Display Switches & Digital LCD (20X4).
- User Friendly Control :- Output Voltage, Chg. Voltage - SPV/ Grid, Chg. Current - SPV/Grid, Grid Reconnect, Batt. Low.
- Priority based working modes - Smart/PCU/Hybrid (for saving energy & money).
- Grid Charging, IT Load - Enable/Disable by LCD.

PCU Mode Priority

Solar/Battery/Grid

Hybrid Mode Priority

For Load - Grid/Solar/Battery
For Charging - Solar/Grid

Smart Mode Priority

For Day Time - Solar/Battery/Grid
For Night Time - Grid/Battery

Application

Hospital



School



Industries



Home



Petrol Pump



Bank



*ALFA PRO SOLAR PCU MODEL AVAILABLE (3.75kVA- 7.5kVA)

ALFA+ SOLAR PCU (1Ph in 1Ph out)



Parameters	Units	Rating													
Model		ALFA+			ALFA PRO				ALFA+						
System Rating	KVA	1	1	2	3.75	5	5	7.5	7.5	10	10	15	15	20	
Operating DC Voltage	V	24	48			96			120		180		240		
Photovoltaic Input															
Input Voltage Range (Min-Max)	VDC	45-90	80-160			160-400			200-400		300-625		400-650		
Maximum PV Power Recom.	KW	1.0	1.0	2.0	3.75	5.0		7.5		10		15		20	
Solar Charge Controller Rating	A	40	20	40	60	100	50	75	60	80	50	80	60	80	
MPPT Based Charging Controller															
Switching Element		Mosfet	IGBT												
Controller		DSP													
Type of Charger		MPPT													
Max. Efficiency	%	95													
Parameter		Configurable												Default Value	
Battery Low Buzzer	V	Batt. Low Cut +0.2												11.2	
Battery Low Cut**	V	10-11.7												11.0	
Battery High Cut (INV.)	V	SPV Present-SPV CHG. REF +1.3V for 15Sec, SPV CHG. REF +1.8V for 2Sec												16	
		SPV Absent-SPV CHG. REF +0.5V for 15Sec, SPV CHG. REF +1.2V for 2Sec												14.7	
Battery Charging Voltage by SPV	V	12.8-16												14.5	
Battery Charging Current by SPV	A	12-60												18	
Battery Charging Voltage by Grid	V	12.5-15.5												14	
Battery Charging Current by Grid	A	6-15												10	
Grid Low Cut Voltage (IT Mode/	V	NA/120-200												175/120	
Grid High Cut Voltage Normal)	V	NA/245-280												260/280	
Grid Charging		Enable/Disable												Enable	
IT Load		Enable/Disable												Disable	
Operating Mode		Smart/PCU/Hybrid												Smart	
Output Voltage Low	V	170-190												185	
Output Voltage High	V	250-260												255	
Input Source		Grid/Genset												Grid	
Li Ion Parameter 100AH															
No. of Cells		8	15			30		38		56		75			
Battery Low Buzzer	V	24.4	45.75			91.5		115.9		170.8		228.75			
Battery Low Cut**	V	23.6	44.25			88.5		112.1		165.2		221.25			
Battery Charging Voltage by SPV	V	28.4	53.25			106.5		134.9		198.8		266.25			
Battery Charging Current by SPV	A	20	20			20		20		20		20			
Battery Charging Voltage by Grid	V	28	52.5			105		133		196		262.5			
Battery Charging Current by Grid	A	10	10			10		10		10		10			
Battery															
Grid Disconnect (Solar Available)		@Solar Charging Voltage Ref Or The Solar Charging Current Ref. For 2 Minutes													
PCU/SMART															
Grid Reconnect (PCU/Smart Mode)	V	11-12												11.5	
Inverter															
Switching Element		Mosfet					IGBT								
Control		PWM													
Nominal Output Voltage	VAC	220 1Phase, 3Wire Pure Sine Wave													
Nominal Frequency	Hz	50.0													
Load Current	A	4.5	4.5	9	13.5	18	18	27	27	36	36	54	72		
Voltage Regulation	%	1													
Output Voltage Distortion with 100% Linear Load	%	<3													
Overload Capacity (IT LOAD DISABLE)		100-120(2time auto reset) : 60sec 120-150(2time auto reset) : 30sec 150-200 : 2sec					200-300 : 1sec 300-400 : 250ms >400 : 20ms								
Overload Capacity (IT LOAD ENABLE)	%	100-110 : 10 Min 110-120 : 2 Min 120-150 : 30sec					150-200 : 2Sec 200-300 : 1Sec 300-400 : 250ms					>400 : 20ms			
Peak Efficiency	%	>82			>88										
Noise @ 1meter	dB	50													
Cooling		Either Load Based (On ≥ 60, Off ≤ 50) or Temperature Based (On ≥ 55°C ±3°C, Off ≤ 42°C ±3°C)													
Protections		Overload, Batt. Low, Batt. High, Output Low, Output High, Output Short Ckt., Overheat, Under Freq., Over Freq.y, Solar Panel Reverse													
Display Parameters		Battery Voltage, Charging Current, Discharging Current, Charging KWH, Discharging KWH, Solar Voltage, Solar Current, Instantaneous Power, Cumulative Power, Grid Voltage, Grid Current, Grid Frequency, Output Voltage, Output Current, Output Frequency IT Load En/Dn Grid Charger En/Dn, Operating Mode PCU/SMT/HYD													
Switches		Reset for System ON/OFF, UP, DOWN, BACK, ENTER (for LCD Configuration)													
Indications		System ON, Inv. ON, SPV Chg., Grid Chg., Batt. Low/High, Overload, Overheat, Mains Low, Mains High, Under Freq., Over Freq., Fault													
Environment															
Operating Temperature	C	0-50													
Max Relative Humidity @25°C(non condensing)	%	95													
Degree of Protection		IP21													
Data Login		30 Day Data Storage													
Dimension (LxWxH)	Inch	18 X 10 X 18			11.7 X 11 X 23.2			24 X 13 X 23			24 X 13 X 26			32 X 16 X 25	
Weight (Approx)	Kg.	32	33	40	38	42	71	65	80	103	120	165			

*Specification are subject to change without prior notice due to constant improvement in design & technology.

**Once Battery Get Full Charged then Batt Low cut as per specification otherwise battery low buzzer 11.55V Per Batt. & Batt low cut 11.50V Per Batt.

SIGMA⁺ Grid Export Solar PCU

rMPPT Hybrid Solar PCU
(1Ph in 1Ph out)

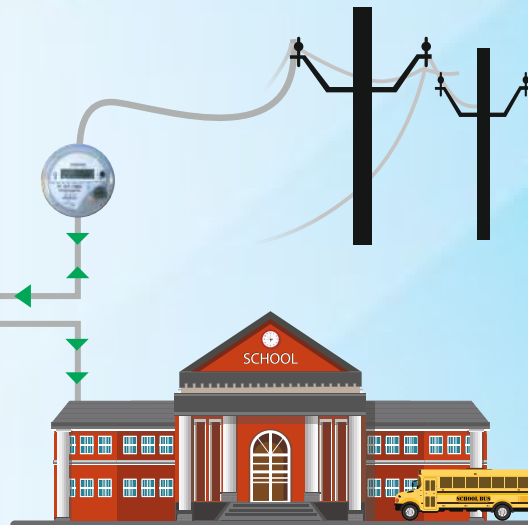

**Model Available
1kVA-15KVA**

FEATURES

- DSPIC based Pure Sine Wave Design.
- Inbuilt in rMPPT charge controller (upto 30% more efficient).
- Grid Interactive.
- Maximum Preference to Solar Power.
- Wi-Fi based remote monitoring (GSM Optional).
- Certified by IEC 61683, 61727, 60529, 60068-2 (1,2,14,30) & 62116 standards.
- Robust Design-20 years product life, 5 yrs of warranty.
- User Friendly & Easily accessible LCD Display with all AC and DC Parameter Configurable by Display Switches & Digital LCD (20X4).
- User Friendly Control :- Output Voltage, Chg. Voltage - SPV/Grid, Chg. Current - SPV/Grid, Grid Reconnect, Batt. Low.
- Reverse AC Voltage Protection.
- Priority based working modes - Smart/PCU/Hybrid (for saving energy & money).
- Grid Export Mode, Grid Charging & IT Load - Enable/Disable by Display Switch.

A SMART PCU

Which Stores as well as Exports Electricity

PCU Mode Priority

Solar/Battery/Grid

Hybrid Mode Priority

For Load - Grid/Solar/Battery
For Charging - Solar/Grid

Smart Mode Priority

For Day Time - Solar/Battery/Grid
For Night Time - Grid/Battery

Grid Export Mode

Solar/Grid/Battery

Application

Hospital



School



Industries



Home



Petrol Pump



Bank





SIGMA⁺ Grid Export SOLAR PCU (1Ph in 1Ph out)

Parameters		Units				Rating							
System Rating		KVA	1	1	2	3	4	5	7.5	10	15		
Operating DC Voltage		V	24	48				96	120	180	240		
Photovoltaic Input													
Input Voltage range(Min.-Max.)		V _{oc}	45-90	80-200				160-400	200-400	300-625	400-650		
Maximum PV power recommended		kW	1	2	3	4	5	7.5	10	15			
Solar Charge Controller Rating		A	40	20	40	60	80	100	50	75	60		
MPPT Based Charge Controller													
Switching Element			MOSFET	IGBT									
Controller			DSP										
Type of Charger			MPPT										
Peak Efficiency		%	95										
Parameters			Configurable								Default Value		
Battery Low Buzzer		V	Batt. Low Cut +0.2								11.2		
Battery Low cut		V	10-11.7								11		
Battery High cut (INV.)		V	SPV Present-SPV CHG. REF +1.3V for 15Sec, SPV CHG. REF +1.8V for 2Sec								15.5		
			SPV Absent-SPV CHG. REF +0.5V for 15Sec, SPV CHG. REF +1.2V for 2Sec								15		
Battery Charging Voltage with SPV		V	12.8-16								14.5		
Battery Charging Current with SPV		A	12-60								18		
Battery Charging Voltage with Grid		V	12.5-15.5								14		
Battery Charging Current with Grid		A	6-15								10		
Grid low cut volt. (IT Mode Enb/Dis)		GRID EXPORT MODE DISABLE	V	NA/120-200								175/120	
Grid high cut volt. (IT Mode Enb/Dis)			V	NA/245-280								260/280	
Grid Charging		V	Enable/Disable								Enable		
IT Mode			Enable/Disable								Disable		
Operating mode			Smart/PCU/Hybrid/Grid Export								Smart Mode		
Input Source			Grid/Genset(for Genset, Grid Export Mode must be Disable)								Grid		
Output voltage low		V	170-190								185		
Output voltage high		V	250-260								255		
Li Ion Parameter			100AH										
No. of Cells			8	15				30	38	56	75		
Battery Low Buzzer		V	24.4	45.75				91.5	115.9	170.8	228.75		
Battery Low Cut**		V	23.6	44.25				88.5	112.1	165.2	221.25		
Battery Charging Voltage by SPV		V	28.4	53.25				106.5	134.9	198.8	266.25		
Battery Charging Current by SPV		A	20	20				20	20	20	20		
Battery Charging Voltage by Grid		V	28	52.5				105	133	196	262.5		
Battery Charging Current by Grid		A	10	10				10	10	10	10		
Grid Export Mode Enable													
Grid Low/recover		V	185/195										
Grid High/recover		V	280/275										
Synchronization voltage range		V	185-280V										
Synchronization frequency range		HZ	47 to 53										
Maximum Charging Current from Grid (Import)		A	6-15								10		
Battery													
Grid Disconnect (Solar Available) PCU/SMART			@14.5V/Battery for 2 minutes OR 13.5V/Battery-100% Current (if Grid Chg. Volt. Ref. set to 14.0V)										
Grid Reconnect (PCU Mode / Smart Mode), Import ON (Grid Export mode)		V	11-12								11.5		
Inverter													
Switching Element			MOSFET					IGBT					
Control			PWM										
Nominal Output voltage			220, 1Phase, 3 Wire, Pure Sine Wave										
Nominal frequency		Hz	50										
Load Current		A	4.5	4.5	9	13.5	14.2	18	27	36	54		
Voltage regulation		%	1										
Output voltage distortion with 100% linear load		%	<3										
Overload capacity		%	IT Load 100-120(2Time auto Reset) : 60sec Disable 120-150(2Time auto Reset) : 30sec				IT Load 100 - 110%:10min; 110 - 120%: 2min; 120 -150%:30sec;		Grid Tie Over Load Indication @>200% ON >200 - 300% : 10min >300 - 400% : 1min >400% : 250ms				
Peak efficiency		%	>85										
Noise @ 1 meter		dB	50										
Cooling			Either Load Based (On ≥ 60, Off ≤ 50) or Temperature Based (On ≥ 55°C ±3°C, Off ≤ 42°C ±3°C)										
Protections			Overload, Battery Low, Battery High, Output Low, Output High, Input Low, Input High, SPV Low, SPV High, Output Short Ckt., Input Short Ckt., Over Temp., Under Frequency, Over Frequency, Solar Panel Reverse, Anti-islanding, Surge Protection, Grid/Solar Charger Open Circuit, NTC Open										
Display Parameters			Battery Voltage, Charging Current, Discharging Current, charging KWH and discharging KWH										
			Solar Voltage, Solar Current, Instantaneous Power, Cumulative Energy										
			Grid Voltage, Grid Current, Frequency, Import Power, Import Energy ,										
			Export Power, Export Energy										
			Output Voltage, Output Current, Frequency, Instantaneous Power & Commutative Energy										
			Grid, Inverter & SPV Charger Status										
Switches			System Info : Grid CHG-EN, IT Load-EN, Input Source-Grid, Operation Mode-Smart										
Indications			Reset for System ON/OFF, UP, DOWN, BACK, ENTER (for LCD Configuration)										
			System ON, Inv. ON, SPV Charging, Grid Charging, Grid Tie ON, Battery Low/High, Overload / Overheat, Mains Low / Mains High, Under frequency/Over frequency, Operating modes (smart, Hybrid, PCU and Gridexport), Fault, HOE										
Environment													
Operating temperature		°C	0-50										
Max. Relative Humidity @ 25 C (non condensing)		%	95										
Degree of Protection			IP-21							IP-20	IP-21		
Data Logging			30 Days Data Storage										
Dimension (LxWxH)		Inch	15x16x15	18 x 10 x 20				23 x 13 x 26		26 x 13 x 26	30 x 16 x 27	26 x 13 x 26	
Weight (Approx)		kg	30	35	43	50	52	60	70	78	103	160	120

*Specification are subject to change without prior notice due to constant improvement in design & technology.

*If battery is not fully charged, battery low cut voltage is 11.5V/batt. If battery is fully charged, battery low cut voltage is equal to set Voltage.

ZETA PRO SOLAR PCU

“A Smart PCU - Which Stores as well as Exports Electricity”

**Model Available in
7.5kVA-50KVA**

**rMPPT™ Hybrid Solar PCU
(3Ph in 3Ph out)**



FEATURES

- DSPIC based Pure Sine Wave Design.
- Inbuilt in rMPPT charge controller (upto 30% more efficient*).
- Grid Interactive.
- Maximum Preference to Solar Power.
- USB based communication, 31 days data logs inbuilt and AC& DC energy meter inbuilt.
- Wi-Fi Based Monitoring.
- Robust Design-20 years product life, 5 yrs of warranty.
- User Friendly & Easily accessible LCD Display with all AC and DC Parameter Configurable by Display Switches & Digital LCD (20X4).
- User Friendly Control :- Output Voltage, Chg. Voltage - SPV/Grid, Chg. Current - SPV/Grid, Grid Reconnect, Batt. Low.
- Reverse AC Voltage Protection.
- Priority based working modes - Smart/PCU/Hybrid (for saving energy & money).
- Grid Export Mode, Grid Charging & IT Load - Enable/ Disable by Display Switch.
- Phase Sequence Protection.

PCU Mode Priority

Solar/Battery/Grid

Hybrid Mode Priority

For Load - Grid/Solar/Battery
For Charging - Solar/Grid


Smart Mode Priority

For Day Time - Solar/Battery/Grid
For Night Time - Grid/Battery

Grid Export Mode

Solar/Grid/Battery

Application

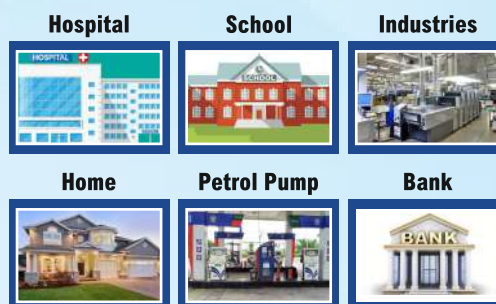

* As Compare with PWM



ZETA SOLAR PCU (3Ph in 3Ph out)

Parameters		Units	Rating				
System Rating		KVA	7.5		10	15	
Operating DC Voltage		VDC	96		120	180	
Photovoltaic Input							
Input open circuit voltage range(Min-Max)		Voc	160-360		200-360	300- 540	
Maximum PV Power Recommended / No. of Charge Controller			7.5KW / 1		10KW / 1	15KW / 1	
Switching Element / Type of Charger / Solar Charge Controller Rating			IGBT / MPPT / 80A				
Peak Efficiency (DC to DC)		%	95				
PANEL CONFIGURATION (S-SERIES, P-PARALLEL)			400W-6S X 3P 440W-6S x 3P 540W-7S x 2P		335W-6S X 5P, 390/400W-5S x 5P 540W-5S x 4P	335W-9S X 5P, 390/400W-8S or 7S x 5P 540W-7S x 4P	
Grid parameter			Configurable				Default
Input Voltage (R,Y,B w.r.t.. N) Nominal		VAC	220V/ Phase				
Frequency Range (R,Y,B w.r.t.. N)		Hz	50 ±3				
Supply Phase & Connection			3Phase / 4Wire				
Switching Element / Bypass Element / Grid charger Efficiency (AC-DC)			IGBT/ SCR / >85%				
Grid Low Cut Voltage R-Y-B w.r.t N (IT Mode-Enable/Disable)		Grid Export Mode Disable	VAC	NA/120-200			175/120
Grid High Cut Voltage R-Y-B w.r.t N (IT Mode-Enable/Disable)			VAC	NA/245-280			260/280
Grid Charger			Enable/Disable				Enable
Grid Export			Enable/Disable				Disable
IT Load			Enable/Disable				Disable
Input Source			Grid/Genset(for Genset, Grid Export Mode must be Disable)				Grid
Grid Export Mode Enable Parameter			Configurable				Default
Grid Low Cut/Recover Voltage R-Y-B w.r.t N		AC	185/195				
Grid High Cut/Recover Voltage R-Y-B w.r.t N		VAC	280/275				
Synchronization voltage range		VAC	185-280				
Synchronization frequency range		Hz	50±3				
Battery Parameter			Configurable				Default
Battery Low Buzzer		VDC	Batt.Low Cut+0.2				11.2
Battery Low Cut		VDC	10-11.7				11
Battery High Cut(Inverter)		VDC	SPV Present- SPV Chg. Ref.+ 1.0V for 15Sec., SPV Chg. Ref.+1.5V for 2Sec				16
			SPV Absent- SPV Chg. Ref for 15Sec, SPV Chg. Ref + 0.2V for 2Sec				14.7
Battery Charging Voltage with SPV		VDC	12.8-16				14.5
Battery Charging Current with SPV		A	12-60				18
Battery Charging Voltage with Grid		VDC	12.5-15.5				14.2
Battery Charging Current with Grid		A	6-15				10
Operation Mode			Smart/Hybrid/PCU				Smart
Grid Disconnect (Solar Available) PCU/SMART		VDC	@14.5V/Battery for 2 minutes or 13.5V/Battery with 100% Charging Current				
Grid Reconnect (PCU Mode/SMART Mode)		VDC	11-12				11.5
Temperature Compensation			@3mV/cell/°C				
Inverter Parameter			Configurable				Default
Switching Element / Control		VAC	IGBT/ PWM				
Nominal Output Voltage (R,Y,B w.r.t.. N)		VAC	220V,230V,240V/ Phase				230V
Output Voltage Low Cut (R,Y,B w.r.t.. N) (Inv. Mode)		VAC	170-190				185
Output Voltage High Cut (R,Y,B w.r.t.. N)(Inv. Mode)			250-260				255
Output Supply Phase / Output Waveform		Hz	3Phase / 4Wire / Pure Sine Wave				
Frequency		A	50± 0.05				
Output Current Per Phase (R,Y,B)		%	8.6		11.6	17.4	
Voltage Regulation		%	±1				
THDv		%	Less than 3% Linear load				
Overload Capacity (IT LOAD DISABLE)		%	100 - 120 % @ 60 Sec (2 Times Retry), 120 - 150 % @ 30 Sec(2 Times Retry),150 - 200 % @ 2 Sec				
Overload Capacity (IT LOAD ENABLE)		%	100 - 110 % @ 10 Min,110 - 120 % @ 2Min, 120 - 150 % @ 30 Sec				
Overload Capacity (Grid Tie ON)		%	200 - 300 % @ 10 Min,300 - 400 % @ 1Min,>400% @250ms				
Peak Efficiency			>85				
Manual Bypass			Rotary Switch				
Cooling			Temperature Controlled Fan				
Protections			Overload, Battery Low, Battery High, Output AC Low, Output AC High, Input AC Low, Input AC High, SPV High, SPV Low, Output AC Short Circuit, Input AC Short Circuit, Over temperature, Under Frequency, Over Frequency, Grid/Solar Charger Open Circuit, NTC Open, Solar Panel Reverse, Anti-islanding, Surge Protection				
Display Parameters			Input R Y B Voltage/Current/Frequency/Import Power/Export Power/Import Energy/Export Energy, Output R Y B Voltage/Current/Frequency/Power/Energy, Solar Voltage/Current/Power/Energy, Battery Voltage/Charg. Current/ Discharging Current/Charging KWh/Discharging Kwh, Inverter Status , Grid Charger Status, Solar Charger Status				
Switches			Reset Switch for System ON/OFF, UP, DOWN, BACK, ENTER(for LCD Configuration)				
LED Indications			System ON, Inverter ON, Grid Charger ON, Grid Tie ON, SPV Charger ON, Grid High/Low R Y B, Grid Frequency under and over R Y B, Output High/Low R Y B, Battery Low/High ,SPV Low/ High, Inverter/Grid charger Overheat, MPPT Overheat, Fault, Overload R Y B, HOE R Y B				
Environment							
Operating Temperature		°C	0 - 50				
Max. Relative Humidity @25°C (non condensing)		%	95				
Noise at 1 Meter / Degree of Protection			60 dBA / IP20				
REMOTE MONITORING SYSTEM (RMS)			Wi Fi				
Data Log			31 Days				
Dimension (L X W X H)		Inch	33 X 16.3 X 27.5				
Weight		Kg	90		105	125	

*Specification are subject to change without prior notice due to constant improvement in design & technology.



ZETA SOLAR PCU (3Ph in 3Ph out)

Parameters		Units	Rating			
System Rating		KVA	20	30	40	50
Operating DC Voltage		VDC	240			
Photovoltaic Input						
Input open circuit voltage range(Min-Max)		Voc	400-720			
Maximum PV Power Recommended / No. of Charge Controller			20KW / 1	30KW / 1	40KW / 1	50KW / 1
Switching Element / Type of Charger / Solar Charge Controller Rating			IGBT / MPPT / 80A	IGBT / MPPT / 125A	IGBT / MPPT / 160A	IGBT / MPPT / 200A
Peak Efficiency (DC to DC)		%	95			
Panel configuration			335W-12 Panel in Series X 5 String, 440W-11 Panel in series x 4 string 540W-12 Panel in series x 3 string	335W-13 Panel in Series X 7 String, 440W-10 Panel in series x 7 string 540W-11 Panel in series x 5 string	335W-12 Panel in Series x 10 String, 440W-10 Panel in series x 9 string 540W-11 Panel in series x 7 string	335W-12 Panel in Series X 12 String, 440W-10 Panel in series x 11 string 540W-10 Panel in series x 9 string
Grid parameter						Default
Input Voltage (R,Y,B w.r.t.. N) Nominal		VAC	220V/ Phase			
Frequency Range (R,Y,B w.r.t.. N)		Hz	50 ±3			
Supply Phase & Connection			3Phase / 4Wire			
Switching Element / Bypass Element / Grid charger Efficiency (AC-DC)			IGBT/ SCR / >85%			
Grid Low Cut Volt. Range R-Y-B w.r.t N (IT Mode-Enable/Disable)	Grid Export Mode Disable	VAC	NA/120-200			175/120
GridHigh Cut Volt. Range R-Y-B w.r.t N (IT Mode-Enable/Disable)		VAC	NA/245-280			260/280
Grid Charger			Enable/Disable			Enable
Grid Export Mode			Enable/Disable			Disable
IT Load			Enable/Disable			Disable
Input Source			Grid/Genset(for Genset, Grid Export Mode must be Disable)			Grid
Grid Export Mode Enable Parameter						
Grid Low Cut/Recover Voltage R-Y-B w.r.t N		AC	185/195			
Grid High Cut/Recover Voltage R-Y-B w.r.t N		VAC	280/275			
Synchronization voltage range		VAC	185-280			
Synchronization frequency range		Hz	50±3			
Battery Parameter						Default
Battery Low Buzzer		VDC	Batt.Low Cut+0.2			11.2
Battery Low Cut		VDC	10-11.7			11
Battery High Cut(Inverter)		VDC	SPV Present- SPV Chg. Ref.+ 1.0V for 15Sec., SPV Chg. Ref.+1.5V for 2Sec			16
			SPV Absent- SPV Chg. Ref for 15Sec, SPV Chg. Ref + 0.2V for 2Sec			14.7
Battery Charging Voltage Range with SPV		VDC	12.8-16			14.5
Battery Charging Current Range with SPV		A	12-60			18
Battery Charging Voltage Range with Grid		VDC	12.5-15.5			14.2
Battery Charging Current Range with Grid		A	6-15			10
Operation Mode			Smart/Hybrid/PCU			Smart
Grid Disconnect (Solar Available) PCU/SMART		VDC	@14.5V/Battery for 2 minutes or 13.5V/Battery with 100% Charging Current			
Grid Reconnect Range (PCU Mode Smart Mode)		VDC	11-12			11.5
Temperature Compensation			@3mV/cell/°C			
Inverter Parameter						Default
Switching Element / Control			IGBT/ PWM			
Nominal Output Voltage (R,Y,B w.r.t.. N)		VAC	230V/ Phase			
Output Volt. Range Low Cut R-Y-B w.r.t N (Inv. Mode)		VAC	170-190			185
Output Volt. Range High Cut R-Y-B w.r.t N (Inv. Mode)		VAC	250-260			255
Output Supply Phase / Output Waveform			3Phase / 4Wire / Pure Sine Wave			
Frequency		Hz	50± 0.05			
Output Current Per Phase (R,Y,B)		A	23	34.7	46.3	57.9
Voltage Regulation		%	±1			
THDv		%	Less than 3% Linear load			
Overload Capacity (IT LOAD DISABLE)		%	100 - 120 % @ 60 Sec (2 Times Retry), 120 - 150 % @ 30 Sec(2 Times Retry),150 - 200 % @ 2 Sec			
Overload Capacity (IT LOAD ENABLE)		%	100 - 110 % @ 10 Min,110 - 120 % @ 2Min, 120 - 150 % @ 30 Sec			
Overload Capacity (Grid Tie ON)		%	200 - 300 % @ 10 Min,300 - 400 % @ 1Min,>400% @250ms			
Peak Efficiency		%	>85			
Manual Bypass			Rotary Switch			
Cooling			Temperature Controlled Fan			
Protections			Overload, Battery Low, Battery High, Output AC Low, Output AC High, Input AC Low, Input AC High, SPV High, SPV Low, Output AC Short Circuit, Input AC Short Circuit, Over temperature, Under Frequency, Over Frequency, Grid/Solar Charger Open Circuit, NTC Open, Solar Panel Reverse, Anti-islanding, Surge Protection			
Display Parameters			Input R Y B Voltage/Current/Frequency/Import Power/Export Power/Import Energy/Export Energy, Output R Y B Voltage/Current/Frequency/Power/Energy, Solar Voltage/Current/Power/Energy, Battery Voltage/Charg. Current/ Discharging Current/Charging KWh/Discharging Kwh, Inverter Status , Grid Charger Status, Solar Charger Status			
Switches			Reset Switch for System ON/OFF, UP, DOWN, BACK, ENTER(for LCD Configuration)			
LED Indications			System ON, Inverter ON, Grid Charger ON, Grid Tie ON, SPV Charger ON, Grid High/Low R Y B, Grid Frequency under and over R Y B, Output High/Low R Y B, Battery Low/High ,SPV Low/ High, Inverter/Grid charger Overheat, MPPT Overheat, Fault, Overload R Y B, HOE R Y B			
Environment						
Operating Temperature		°C	0 - 50			
Max. Relative Humidity @25°C (non condensing)		%	95			
Noise at 1 Meter / Degree of Protection			60 dBA / IP20			
Dimension (L X W X H)		Inch	33 X 16.5 X 27.5	27.5 X 27.5 X 67.5		
Weight		Kg	145	300	350	400

*Specification are subject to change without prior notice due to constant improvement in design & technology.

MARS Online Solar PCU

“3 Phase with Zero Changeover Time”


Available in
5-20KVA (3 in - 1 Out)

rMPPT™ Online Solar PCU



FEATURES

- DSPIC based design Pure Sine wave, inbuilt rMPPT charge controller.
- Thermal Protection.
- Maximum Preference to Solar Power.
- Ethernet based monitoring (Optional).
- Noiseless in Operation.
- Robust Design - 20 years Product life.
- Configurable Priority.
 - a) Solar/Battery/Grid
 - b) Solar/Grid/Battery
- AC and DC Parameter Configurable from LCD.
- AC-Output Voltage.
- DC- Charging Voltage Battery Charging Current, Battery Low Cut/High Cut.
- High Surg Capability (up to 300%) for starting heavy load.
- High Efficiency & High Reliability.

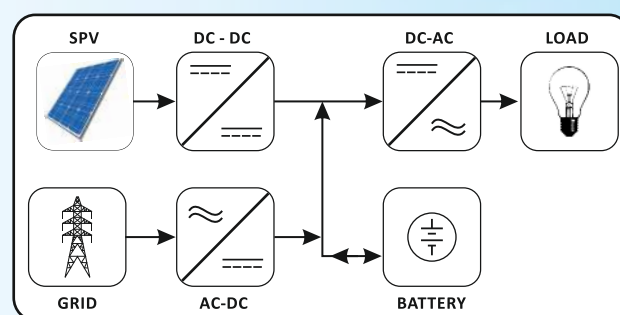

Working Mode

Solar/Grid/Battery
or
Solar/Battery/Grid

Application

Hospital



School



Industries



Home



Petrol Pump



Bank



MARS ONLINE SOLAR PCU (3Ph in 1Ph out)

Input	Power Rating	5kVA/240V	7.5kVA/240V	10kVA/240V	15kVA/240V	20kVA/360V
	Voltage Range	400V±20% Three phase four wire				
	Frequency	50Hz ±3%				
	Power Factor	>0.92				
	Charger Topology	Buck				
	Connection Type	Terminal Block				
Solar	K Watt	5KW	7.5KW	10KW	15KW	20KW
	Voc (min-max)	400V - 740V				
	Vmp	288V - 660V				
	Panel Configuration (S-SERIES, P-PARALLEL)	335W	14S X 1P	11S X 2P	10S X 3P	11S X 4P
		440W	11S X 1P	9S X 2P	11S X 2P	11S X 3P
		540W	9S X 1P	14S X 1P	10S X 2P	10S X 3P
	Switching Devices	IGBT				
	Switching Freq.	16KHz				
	No. of Charger Controller	One				
	Charger Topology	Buck				
	Type of Charger	PWM with MPPT				
	Peak Efficiency (DC - DC)	96%				
	Parameter	Configurable				Default
	Battery Low Buzzer	Batt Low Cut + 0.2				10.7V
	Battery Low Cut	10-11.7V				10.5V
	Battery High Cut (Charger)	Batt Volt By SPV + 0.7				14.5
	Batt. CHG. Volt. by Grid	13-14.5V				13.3V
	Batt. CHG. Current. by Grid	3-12A				10A
	Batt. CHG. Volt. by SPV	13.5-15V				13.8V
	Batt. CHG. Current. by SPV	5-24V				18V
	Grid Charger Reconnect	Enable /Disable				Disable
	Output Voltage Low Cut	170-190V				180V
	Output Voltage High Cut	250-260V				255V
Output	Voltage	220V/230V/240V±1% (1phase 2 wire)				
	Load Current	17.4A	26.08A	34.78A	52.17A	69.6A
	Efficiency (AC - AC)	>90%@Full Load				
	Frequency	50Hz				
	Waveform	Pure Sine Wave				
	Transient Response	<8 (10%~90% Linear Load)				
	Voltage Harmonics	<3% Linear Load				
	Overload Capacity	100 to 110%-10 Min., 110 to 120%-2 Min.; 120 to 150%-30 Sec; 150 to 200%-2 Sec; 200 to 300%-1sec.; 300 to 400%-250msec., >400%-20-30msec				
	Crest Factor	3:1				
	Voltage Harmonics	±1%				
	Frequency Regulation	±0.05Hz				
	Connection Type	Terminal Block				
	Alarm	Battery Low, battery High, Overload				
	LED Indication	#UPS ON #Mains CHG. #Overload #Output High/Low #Battery High/Low, #Bypass #SPVCG. ON #SPV High/Low #CHG. OVERHEAT #AC Input High/Low R,Y,B #fault				
	LCD (20*4) Display	#Input Voltage & Freq. R,Y,B #Output Voltage, Freq. & Load% # Battery Voltage #Charging Current #Solar Voltage, Solar Current, Solar Watt, #Working Status				
	Protections	#Output Overvoltage/Undervoltage, #Overload, #Output Shortcircuit, #Battery Overvoltage/undervoltage #SPV Under Voltage/ Over Voltage #Input Under Voltage/Over Voltage				
Miscellaneous	Transfer Time	0 msec				
	Extended Battery Charging	Optional				
	Caster Wheels	Yes				
Environmental	Operating Environment	0-50° C				
	Operating Relative Humidity	(5%-95%) Non-condensed				
	Storage Environment	0-75°C				
	Operational Logic	SOLAR BATTERY GRID SOLAR GRID BATTERY				
	Storage Relative Humidity	0-95%				
	Degree of Protection	IP20				
	Remote Monitoring	Ethernet (Optional)				
	Dimension (LXWXH) Inch	30x16x27				

*Specification are subject to change without prior notice due to constant improvement in design & technology.

MARS ONLINE SOLAR PCU (3Ph in 3Ph out)


Input	Power Rating		5kVA/240V	7.5kVA/240V	10kVA/240V	15kVA/240V
	Voltage Range		400V±20% Three phase four wire			
	Frequency		50Hz ±3%			
	Power Factor		>0.92			
	Charger Topology		Buck			
	Connection Type		Terminal Block			
Solar	K Watt		5KW	7.5KW	10KW	15KW
	Voc (min-max)		400V - 740V			
	Vmp		288V - 660V			
	Panel Configuration (S-SERIES, P-PARALLEL)	335W	14S X 1P	11S X 2P	10S X 3P	11S X 4P
		440W	11S X 1P	9S X 2P	11S X 2P	11S X 3P
		540W	9S X 1P	14S X 1P	10S X 2P	10S X 3P
	Switching Devices		IGBT			
	Switching Freq.		16KHz			
	No. of Charger Controller		One			
	Charger Topology		Buck			
	Type of Charger		PWM with MPPT			
	Peak Efficiency (DC - DC)		96%			
	Parameter		Configurable		Default	
	Battery Low Buzzer		Batt Low Cut + 0.2		10.7V	
	Battery Low Cut		10-11.7V		10.5V	
	Battery High Cut (Charger)		Batt Volt By SPV + 0.7		14.5	
	Batt. CHG. Volt. by Grid		13-14.5V		13.3V	
	Batt. CHG. Current. by Grid		3-12A		10A	
	Batt. CHG. Volt. by SPV		13.5-15V		13.8V	
	Batt. CHG. Current. by SPV		5-24V		18V	
	Grid Charger Reconnect		Enable /Disable		Disable	
	Output Voltage Low Cut		170-190V		180V	
	Output Voltage High Cut		250-260V		255V	
Output	Voltage		380V/400V/415V ±1% (3phase 4 wire)			
	Load Current		5.8A	8.7A	11.6A	17.4A
	Efficiency (AC - AC)		>90%@Full Load			
	Frequency		50Hz			
	Waveform		Pure Sine Wave			
	Transient Response		<8 (10%~90% Linear Load)			
	Voltage Harmonics		<3% Linear Load			
	Overload Capacity		100 to 110%-10 Min., 110 to 120%-2 Min.; 120 to 150%-30 Sec; 150 to 200%-2 Sec; 200 to 300%-1sec.; 300 to 400%-250msec., >400%-20-30msec.			
	Crest Factor		3:1			
	Voltage Harmonics		±1%			
	Frequency Regulation		±0.05Hz			
	Connection Type		Terminal Block			
	Alarm		Battery Low, battery High, Overload			
Indication	LED		#UPS ON #Mains CHG. #Overload R,Y,B #Output High/Low R,Y,B #Battery High/Low #SPVCHG. ON #SPV High/Low #CHG. OVERHEAT #AC Input High/Low R,Y,B #FAULT.			
	LCD (20*4)		#Input Voltage & Freq. R,Y,B #Output Voltage, Freq. & Load% R,Y,B # Battery Voltage #Charging Current #Solar voltage, Solar Current, Solar Watt, #Working & Fault Status.			
Protect-ions	Parameters		#Output Overvoltage/Undervoltage, #Overload, #Output Shortcircuit, #Battery Overvoltage/undervoltage #SPV Under Voltage/ Over Voltage #Input Under Voltage/Over Voltage.			
Miscell aneous	Transfer Time		0 msec			
	Extended Battery Charging		Yes			
	Caster Wheels		Yes			
Environ mental	Operating Environment		0-50° C			
	Operating Relative Humidity		(5%-95%) Non-condensed			
	Storage Environment		0-75°C			
	Storage Relative Humidity		0-95%			
	Degree of Protection		IP20			
	Remote Monitoring		Ethernet (Optional)			
	Dimension (LXWXH) Inch		23x13x26		30x16x27	

*Specification are subject to change without prior notice due to constant improvement in design & technology.

STAR Online Solar PCU

**“3 Phase with Zero Changeover Time
for Heavy Loads”**

**Available in
20-120kVA**

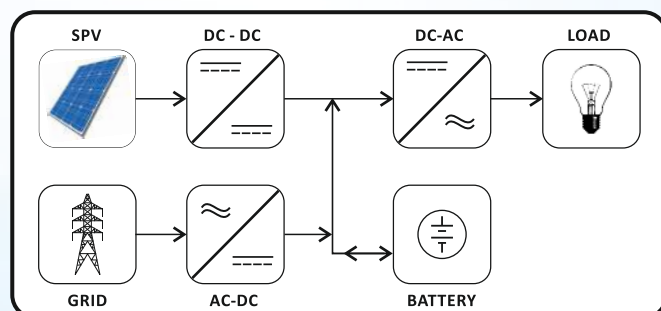

FEATURES

- Upto 30% more Efficient because of rMPPT Charge Controller.
- Short Circuit, Input Under/Over Voltage Protection.
- Advanced DSPic based Design Pure Sine Wave
- User Configurable Parameters.
- Lightening, Surge Protection by SPD.
- Ethernet based Monitoring with Solar Data logs.
- Intelligent Charge Sharing.
- RS485 Based Monitoring (optional).
- Inbuilt Solar Energy Meter with 31 days data logs.


Online Solar PCU



Working Mode

**Solar/Grid/Battery
or
Solar/Battery/Grid**

Application

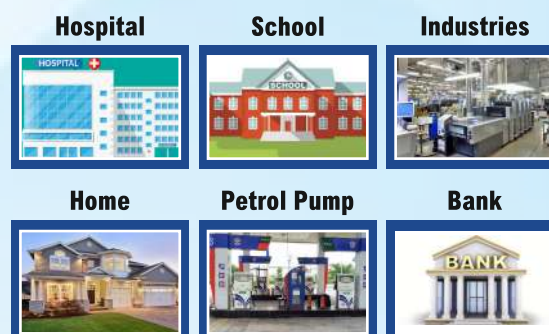

STAR ONLINE PCU 20-40KVA (3Ph in 1Ph out)

Power Rating		20kVA/240V	25kVA/240V	25kVA/360V	30kVA/360V	40kVA/360V
Input						
Voltage Range		400V± 20% Three phase four wire				
Frequency		50 Hz ± 3Hz				
Power Factor		0.94				
Charger Topology		Buck				
Connection Type		Terminal Block				
Solar						
K watt		20	25		30	40
Voc (min-max)		360-720	360-720	540-810		
Vmp		320-680	430-730			
Panel Configuration (S-SERIES, P-PARALLEL)	335W	12SX5P	15SX5P	15SX5P	15SX6P	15SX8P
	440W	12SX4P	11SX5P	14SX4P	14SX5P	15SX6P
	540W	12SX3P	12SX4P	12SX4P	14SX4P	15SX5P
switching devices		IGBT				
switching freq.		16KHZ				
charge controller		One				
Charger Topology		Buck				
Type of Charger		rMPPT				
Output						
Voltage		220V/230V/240V Default 230V± 1%				
Load Current		69.6A	86.9A		104.3A	139A
Efficiency(AC to AC)		>90% @ Full Load				
Frequency		50 Hz				
Waveform		Pure Sine Wave				
Transient Response		<8 (10%~90% Linear Load)				
Voltage Harmonics		< 3 % (Linear load)				
Overload Capacity		100- 110%@10 Min, 110 -120%@2 Min; 120-150%@30s; 150- 200%@ 2s; 200- 300% @1s; 300-400%@250ms; >400%@20ms				
Crest Factor		3:1				
Voltage Regulation		± 1%				
Frequency Regulation		± 0.05 Hz				
Connection Type		Terminal Block				
Audible warning						
Alarm		Battery Low, Battery High, Overload				
Indications						
LED		UPS ON # CHG ON # Input R,Y,B High / low # Output Low-High # Overload # Fault # Batt. Low/High # SPV Low/High # SPV CHG ON #				
LCD (20*4)		Output Voltage, Load & Freq. # Battery Voltage # Charging Current # Input Voltage, Freq R,Y,B # Solar Voltage # Solar Current # Solar Watt # Working Status				
Protections						
Parameters		# Output Overvoltage/Undervoltage # Overload # Output Short Circuit # Battery Overvoltage/Undervoltage #Input Overvoltage/Undervoltage				
Miscellaneous						
Transfer Time		0 msec				
Extended Battery Charging		Optional				
Caster wheels		Yes				
Environmental						
Operating Environment		0-50 °C				
Operating Relative Humidity		5 - 95 % (Non-condensed)				
Storage Environment		0-75 °C				
Storage Relative Humidity		0-95%				
Degree of Protection		IP 20				
Remote Monitoring		Ethernet (Optional)				
Dimension (LXWXH) Inch				39X26X35		34X34X43

*Specification are subject to change without prior notice due to constant improvement in design & technology.

STAR ONLINE PCU 20-120KVA (3Ph in 3Ph out)

Power Rating	20kVA/240V	20kVA/360V	25kVA/240V	30kVA/360V	40kVA/360V	50kVA/360V	60kVA/360V	80kVA/360V	100kVA/360V	120kVA/360V	
Input											
Voltage Range	400V±20% Three phase four wire										
Frequency	50 Hz ± 3Hz										
Power Factor	0.95										
Charger Topology	Buck										
Connection Type	Terminal Block										
Solar											
K watt	20		25	30	40	50	60	80	100	120	
Voc (min-max)	400-720	540-810	400-720		540-810						
Panel Configuration (S-SERIES, P-PARALLEL)	335W	12SX5P	15SX4P	15SX5P	15SX6P	15SX8P	15SX10P	15SX12P	15SX16P	15SX20P	15SX24P
	440W	12SX4P	15SX3P	11SX5P	14SX5P	15SX6P	14SX8P	14SX10P	15SX12P	14SX16P	15SX18P
	540W	12SX3P	13SX3P	12SX4P	14SX4P	15SX5P	13SX8P	14SX8P	15SX10P	12SX16P	13SX18P
Switching devices	IGBT										
Switching freq.	16KHZ										
No. of Charge Controller	One										
Charger Topology	Buck										
Type of Charger	MPPT										
Peak Efficiency(DC to DC)	96%										
Output											
Voltage (Ph-Ph)	380/ 400V/415V ± 1% Configurable by LCD Display										
Load Current Per Phase	23A		29A	34.8A	46.3A	57.9A	69.5A	92.75A	115.9A	139A	
Efficiency(AC to AC)	>88% @ Full Load						>90% @ Full Load				
Frequency	50 Hz										
Waveform	Pure Sine Wave										
Transient Response	<8 (10%~90% Linear Load)										
Voltage Harmonics	< 3 % (Linear load)										
Overload Capacity	100- 110%@10 Min, 110 -120%@2 Min; 120-150%@30s; 150- 200%@ 2s; 200- 300% @1s; 300-400%@250ms; >400%@20ms										
Crest Factor	3:1										
Voltage Regulation	± 1%										
Frequency Regulation	± 0.05 Hz										
Connection Type	Terminal Block										
Audible warning											
Alarm	Battery Low, Battery High, Overload										
Indications											
LED	UPS On #Mains Chg. # Battery High / Low # Overload R,Y,B # Output High/Low R,Y,B # AC Input High / Low R,Y,B # SPV Charging ON # CHG. Overheat # SPV High/ Low										
LCD (20*4)	#Input Voltage & Freq. R,Y,B # Output Voltage, Freq. & Load % R,Y,B # Battery Voltage # Charging Current # Solar Voltage, Solar Current, Solar Watt # Working Status										
Protections											
Parameters	#Input Overvoltage/Undervoltage # Overload # Output Short Circuit # Battery Overvoltage #Input Overvoltage/Undervoltage.										
Miscellaneous											
Transfer Time	0 msec										
Extended Battery Charging	Optional										
Caster wheels	Yes										
Environmental											
Operating Environment	0-50 °C										
Operating Relative Humidity	5 - 95 % (Non-condensed)										
Storage Environment	0-75 °C										
Storage Relative Humidity	0-95%										
Degree of Protection	IP 20										
Remote Monitoring	Ethernet (Optional)										
Dimension (LXWXH) Inch	39X26X35				34X34X43			49X34X69			

*Specification are subject to change without prior notice due to constant improvement in design & technology.

PWM (Solar Charge Controller)

Available in
10A & 20A



FEATURES

- Controller Based PWM Technology.
- Works Efficiently.
- LED/LCD Indication.
- Over Charging Current Protection.
- Over Charging Voltage Protection.
- Battery Reverse Protection.
- Overload Protection.
- SPV Reverse Polarity Protection.
- Reverse current flow from Battery Solar Array Protection.

PWM (Solar Charge Controller)

General				
Model	PWM1224/10A LED		PWM1224/20A LCD	
DC Voltage	12V	24V	12V	24V
Precise Control	Micro controller			
Operating Temperature	0-50°C			
Storage Temperature	-20° to 70°C			
Battery Type	Tubular			
Battery Capacity	200 AH Max.			
Battery Charging Regulation Mode	PWM			
Operating Solar Input Voltage (Voc) Max	25V	49.5V	25V	49.5V
Solar Module Size(Max)	165W*1	390W*1	165W*2 (Parallel)	390W*2 (Parallel)
Electrical				
Nominal Battery voltage	12/24V DC (Auto Sensing)			
SPV Chg. Voltage Boost	14.5V	29V	15.5V	31V
Solar Current (max)	10A		20A	
Load Current Max.	10A		20A	
Charge Controller Efficiency	>95%			
Idle Consumption	<30mA			
Min. Solar Input Voltage(Voc) @ Startup	17V±2V	30V±2V	17V±2V	30V±2V
Load Condition				
USB Port	5V / 2A			
Battery Low Voltage Load Disconnect	10.8V±0.2V	21.6V±0.4V	10.8V±0.2V	21.6V±0.4V
Battery Low Voltage Load Recovery	12.6V±0.2V	25.2V±0.4V	12.6V±0.2V	25.2V±0.4V
Battery High Voltage Load Disconnect	15.0V±0.2V	30.0V±0.4V	16.0V±0.2V	32.0V±0.4V
Battery High Voltage Load Recovery	14.0V±0.2V	28.0V±0.4V	15.5V±0.2V	31.0V±0.4V
LED Indication				
Solar ON	Green		NA	
Solar Over Load	Red		NA	
Batt. High	Green		NA	
Batt. Low	Red		NA	
Load ON	Green		NA	
Over Load	Red		NA	
Display Parameter				
Batt. Voltage, Batt. Current	NA		Yes	
Solar Status: Absent, Charging OFF, Overload	NA		Yes	
Load Current	NA		Yes	
Charger ON	NA		Yes	
Overload				
100%	Continues			
101%-120%	10 Min ON/1 Min OFF		30 Sec. ON/1 Min OFF	
121%-150%	30 Sec. ON/1 Min. OFF		1 Sec. ON/1 Min. OFF	
150%-200%	2 Sec. ON/1Min. OFF		250mSec. ON/1Min. OFF	
>200%	250mSec. ON 1 Min. OFF			
Protections				
Battery Voltage (High/Low)	Available			
Battery Reverse	Available			
SPV Reverse	Available			
SPV Current (High/Low)	Available			
Reverse Current Flow from Battery to Solar Panel Array	Available			
Load short Circuit through DC Fuce	Available			
Physical				
Weight	130gm		300gm	
Dimension (LXWXH) MM	75x132x36 mm		100x161x50 mm	


Protect Solar Charge Controller from direct Sunlight & Water.

Panel open circuit voltage should not to do be more than specified voltage.

*Specification are subject to change without prior notice due to constant improvement in design & technology.

SMU (PWM) Solar Management Unit

“Convert your Home Inverter into Solar Inverter”

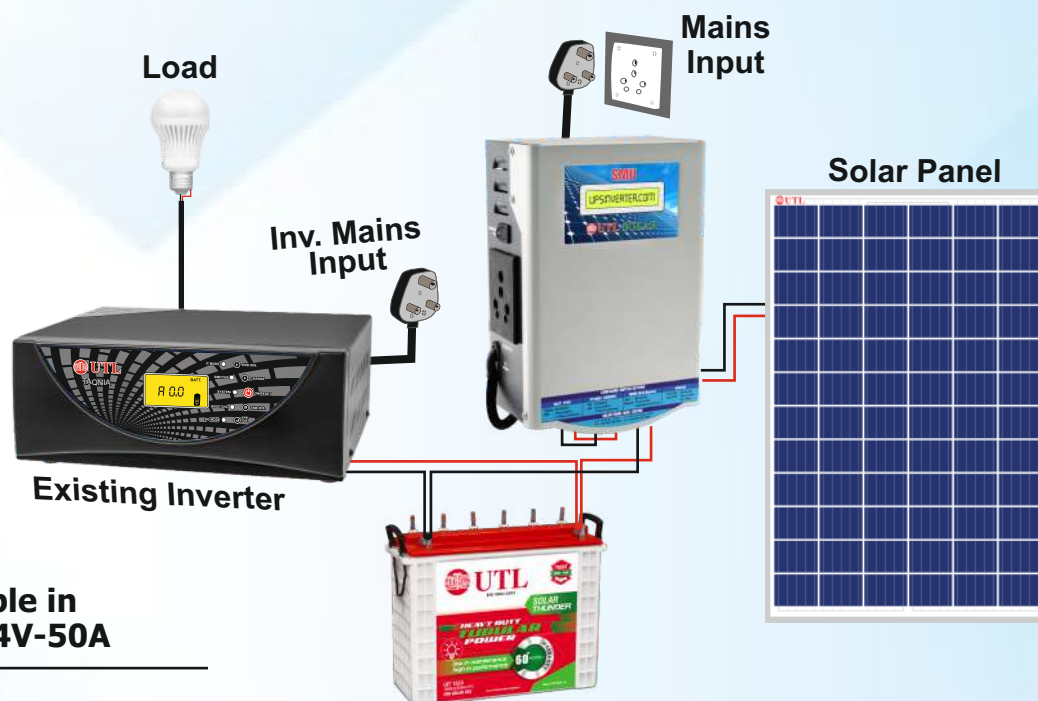

**Available in
12V/24V-50A**

FEATURES

- High speed and high performance micro-controller.
- High reliability with longer operational life.
- Inbuilt protection to avoid battery undercharge and over-charge.
- Inbuilt PWM Technology Charge Controller.
- Automatic voltage selection for 12V or 24V.
- Solar Prioritization.
- Compact design with wall mounting.
- Eco friendly.


SOLAR MANAGEMENT UNIT

General	
Model	SMU122450
Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C
System Operating Voltage	12V/24V DC
Battery Type	Tubular/SMF
Battery Capacity Max.	200AH
Battery Charging Regulation Method	4 Stage PWM (Bulk/Absorption/Float/Equalize)
Maximum Solar Power	12V : 800W, 24V : 1700W
Max. Solar Panels Recommended	12V, 25A:150W/165W *3 (Parallel)
	12V, 50A:150W/165W *5 (Parallel)
	24V, 25A:250W/315W/325W*3 (Parallel)
	24V, 50A : 250W*6 , 315W/325W*5, 390W/400W/425W*4 (Parallel)
Electrical	
Nominal Grid Voltage	230V AC 1Φ
Grid Low Cut	90V ± 10V
Grid High Cut	290V ± 10V
Charging Current (Solar)	50A/25A
Charge Controller Efficiency	>95%
Idle Consumption	<20mA
Max. Solar input Voltage (Voc)	17V-25V (12V Batt.)
	31V-49.5V (24V Batt.)
Min. Solar input voltage (Voc) @ Start-up	15V/30V ± 2%
Solar Panel Recovery Voltage	17V/34V ± 2%
Max. Solar Current	50A By Default
Efficiency	>95%
Battery Set Points @ 25°C	
Bulk Voltage Tubular Battery	14.6V/29.2V ± 2%
Absorption Voltage Tubular Battery	14.2V/28.4V ± 2%
Float Voltage Tubular Battery	14V/28V ± 2%
Bulk Voltage SMF Battery	13.7V/27.4V ± 2%
Float Voltage SMF Battery	13.5V/27.0V ± 2%
Absorption Duration	3Hr
Equalize Voltage	14.9V/29.8V ± 2%
Equalize Duration	3Hr
Equalize calender	28 days
Mains reconnect when Solar not present	At any Batt. Voltage
Mains reconnect when insufficient Solar Power	<11.8V/ 23.6V ± 2%
Mains disconnect when sufficient Solar Power For Tubular	>13.8V/27.6V ± 2%
Mains disconnect when sufficient Solar Power For SMF	13.7V/27.4V ± 2%
Display Parameters	
1. Batt. Voltage, Batt. Current, Batt. Type	1. Battery Reverse Polarity
2. Solar Voltage, Solar Current	2. Batt. Reverse Current
3. Mode Selection	3. Over Current of SPV : >56A/28A
4. Solar Status: High, Low, Overload, Overheat	4. Solar High Voltage
5. Saving- KWh	5. SPV Reverse Polarity
6. Mains Present, Low, High, Absent	6. Load Short Circuit through AC Fuse
7. Max. PV Current	7. Solar Low Voltage
	8. Over Temperature
Physical	
Ingress Protection	IP-20
Fixing	Wall Mounted
Weight (Kg)	2.33
Dimension (LxWxH) Inch	9.6 X 6.9 X 4.9

*Specification are subject to change without prior notice due to constant improvement in design & technology.

SMU (rMPPT) Solar Management Unit

“Convert your Home Inverter into Solar Inverter”

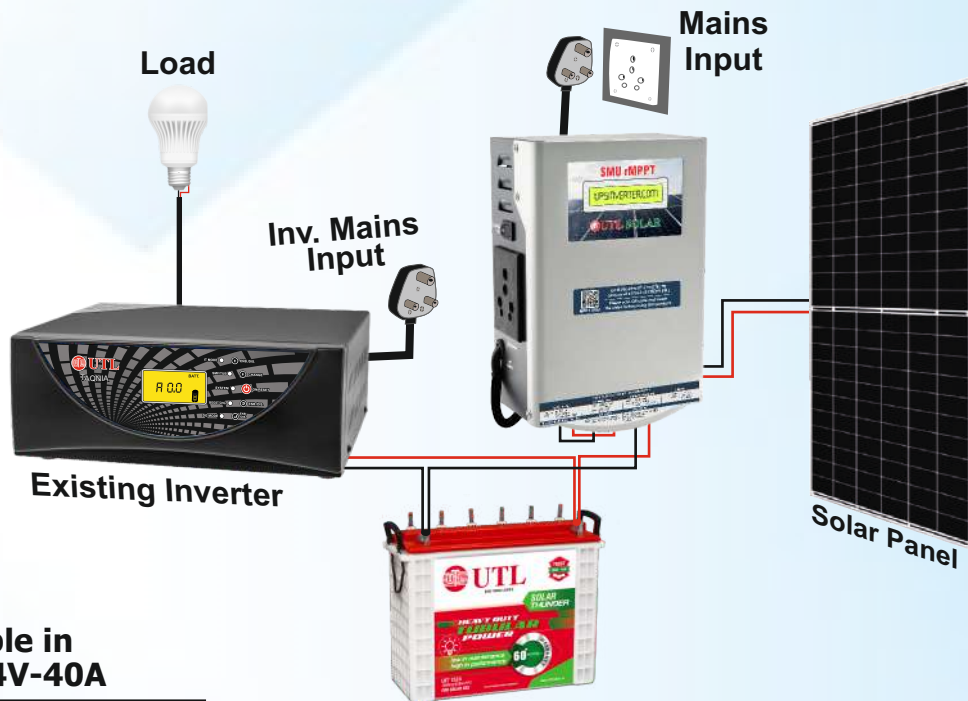

**Available in
12V/24V-40A**

FEATURES

- High speed and high performance micro-controller.
- High reliability with longer operational life.
- Inbuilt protection to avoid battery undercharge & over-charge.
- Inbuilt rMPPT Technology Charge Controller.
- 3 Stage Charging BLK, ABS, FLT.
- Automatic Voltage selection for 12V or 24V.
- Solar Prioritization.
- Compact design with Wall Mounting.
- Eco friendly.
- Transient and Surge Protection.
- Over Temperature Protection.



SOLAR MANAGEMENT UNIT

General		
Model	SMUMPPT122440	
Nominal System Voltage	12V DC	24V DC
Battery Capacity Max.	200AH	
Battery Type	Tubular/SMF	
Battery Charging Regulation Method	3 Stage (Bulk/Absorption/Float)	
Solar Charger Type	MPPT	
Solar Power (Max.)	600W	1200W
Max. Solar Panel (Recommended)	150W/165W X2 (Series) X 2 (Parallel) 315W/325W/330W/335W X 2 (Parallel) 390WX1	315W/325W/330W/335WX4 (Parallel) 390W/425WX3. 540WX2 (Parallel) 315W/325W/330W/335WX 2 (Series) X 2 (Parallel)
Max. Solar input Voltage(Voc)	15V-49.5V	30V-99V
Idle Consumption	<20mA	
Efficiency	>95%	
Battery set points		
Tubular	Boost Voltage :- 14.5V ± 0.2V	Boost Voltage :- 29.0V ± 0.2V
	Float voltage :- 14V ± 0.2V	Float voltage :- 28V ± 0.2V
	Bulk Absorption :14.8V ± 0.2V	Bulk Absorption :29.6V ± 0.2V
SMF	Boost/Float Voltage : 13.8V ± 0.2V	Boost/Float Voltage : 27.6V ± 0.2V
	Bulk Absorption : 14.1V ± 0.2V	Bulk Absorption : 28.2V ± 0.2V
Battery Current Max.	40A	
Grid		
Mains Low cut /Recovery	90V/100V ± 10V	
Mains high cut /Recovery	290V/280V ± 10V	
Mains reconnect when Solar not present	At any Batt. Voltage	
Mains Disconnect	If Battery reaches boost level then after <5 min. Mains will be disconnected.	
Mains Reconnect	Battery volt. : 11.8V	Battery volt. : 23.6V
Display Parameters		
Display Type	LCD	
Display Parameters	Batt. Voltage, Batt. Current, Batt. Type(TUB/SMF), Solar Voltage, Solar Current, Solar Saving- KWh, Mode Selection (Auto/Manual), Mains Present, Absent	
Protections		
Protections	Battery Reverse Polarity (Fuse blown), Batt. Reverse Current, SPV Over Current, Solar High Voltage, SPV Reverse Polarity, Over Temperature, Mains High Cut, Mains Low Cut	
Operating Temperature	0°C to 50°C	
Storage Temperature	0°C to 60°C	
Ingress Protection	IP-20	
Fixing	Wall Mounted	
Weight (Kg)	2.6	
Dimension (LXWXH) Inch	9.25 x 9 x 4.15	

* Specifications are subject to change without prior notice due to constant improvement in design & technology.

PRESTIGIOUS CUSTOMERS


Our Business Ethics helped us to achieve the huge list of fully satisfied clients spread all over the world.



and many more...

UTL Presence

**Serving in
5000 Locations.**

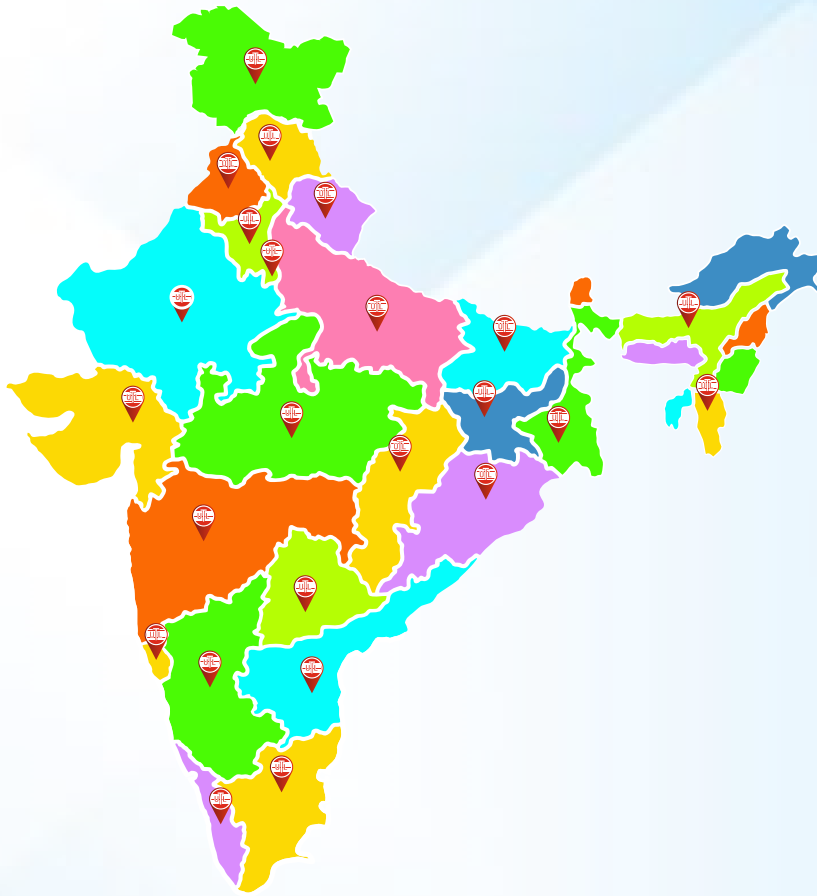

Jammu & Kashmir		Jharkhand	
Himanchal Pradesh		West Bengal	
Punjab		Assam	
Haryana		Mizoram	
Delhi		Maharashtra	
Uttarakhand		Goa	
Uttar Pradesh		Odisha	
Bihar		Telangana	
Rajasthan		Andhra Pradesh	
Gujarat		Karnataka	
Madhya Pradesh		Kerala	
Chhattisgarh		Tamil Nadu	

UTL SOLAR GLOBAL PRESENCE



The Power.....

As and when you need it.



**Inverters | Batteries | Solar PCUs | Online UPSs | EV Chargers |
Lithium Batteries | Solar Inverters | Solar Panels | VFD**

FUJIYAMA POWER SYSTEMS PVT. LTD.

📍 Corporate Office :-

63, 2nd Floor Rama Road Opp. Kirti Nagar Metro Station Near Andaz Banquet, Delhi-110015

🏭 Manufacturing Unit :-

Unit 1 : Village Naryal, Near Sec-4 Barrier, Parwanoo, H.P. - 173220

Unit 2 : Plot No 51-52, Sector - Ecotech 1 Extension 1, Greater Noida, Distt-Gautam Budh Nagar, U.P. - 201310

Unit 3 : Sector 6 Industrial Estate, Plot/Shed No. 5 & 14, IMT BAWAL, Phase 1, Bawal, Rewari, Haryana-123501

Unit 4 : 53A/4,6 Rama Road Ind. Area, Near NDPL Grid Office, Delhi - 110015.

📞 For Sales : +91 9250 885 885

For Service : +91 8510 885 885

✉ sales@utlups.com

🌐 www.upsINVERTER.com



Scan QR Code
to download the catalogue